

*Vinyl Finishes*

# Vinyl Color Selector



**HUF COR**<sup>®</sup>

*shaping your experience*

## PRODUCT FEATURES

- » Compliant with the performance standards established for low-emitting wallcovering by LEED v4 and the California Department of Public Health (CDPH) in classroom and office settings. Compliant with the California Collaborative for High Performance Schools (CHPS).
- » Contains additives to resist mold and other micro-biological growth on the decorative surface of the product. These additives, however, will not prevent mold growth if moisture is allowed to accumulate in or behind the wall.
- » PFOA free – does not contain, nor will it degrade into, Perfluoro Octanoic Acid (PFOA).
- » NFPA 101 and IBC Class A interior wall finish rating when tested using ASTM-E84 method of reinforced cement board and Type X gypsum board and when tested in accordance with NFPA 286.

## CLEANING INSTRUCTIONS

- » Common dirt and stains may be removed from wallcovering by rubbing lightly with a moistened cloth, sponge or stiff bristle brush using a mild soap, detergent or non-abrasive cleanser. It is important that clean water be continuously used and that the material be towel dried.
- » CAUTION: Strong organic solvents (such as ketones) and harsh abrasive cleaners are not recommended. These materials will cause dulling, discoloration or softening of the vinyl, possibly resulting in permanent damage.

## VINYL SPECIFICATIONS

### Type II & Class A Patterns

Highland, Cairn & Woodtone

Minimum Weight: **20 oz./lin. yd.**

Average Width: **54" [1372mm]**

Mildew Resistant: ✓

CCFA-W-101: ✓

CCC-W-408A & C: ✓

Flame Developed: **20 gypsum / 10 cement board**

Smoke Developed: **45 gypsum / 20 cement board**



MEA Approved N.Y. Dept. of Buildings: ✓

NFPA 101-94 when tested by ASTM E84-91: ✓

*\* Actual color provided may vary from swatch shown due to dye lot variations.  
Room lighting may also change the color's appearance.*

## HIGHLAND PATTERN



*Recommended for use on a tackable surface.  
Surface helps conceal pin holes. Pattern is a random match.*

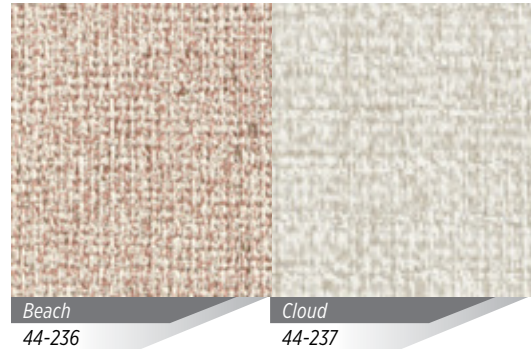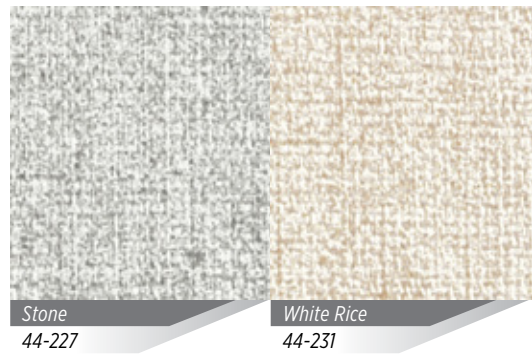

**\*\***Additional lead time may apply for this reference, contact Hufcor or your representative for more information.



## CAIRN PATTERN

NOT recommended for use on a tackable surface.  
Tack holes will become visible over time. Pattern is a random match.

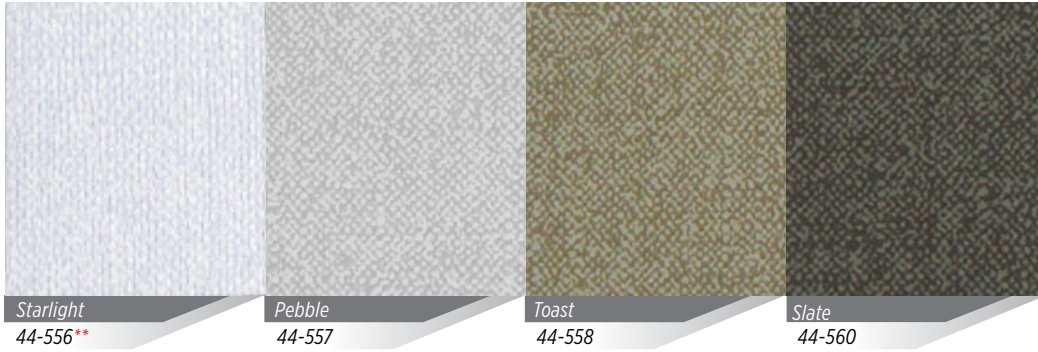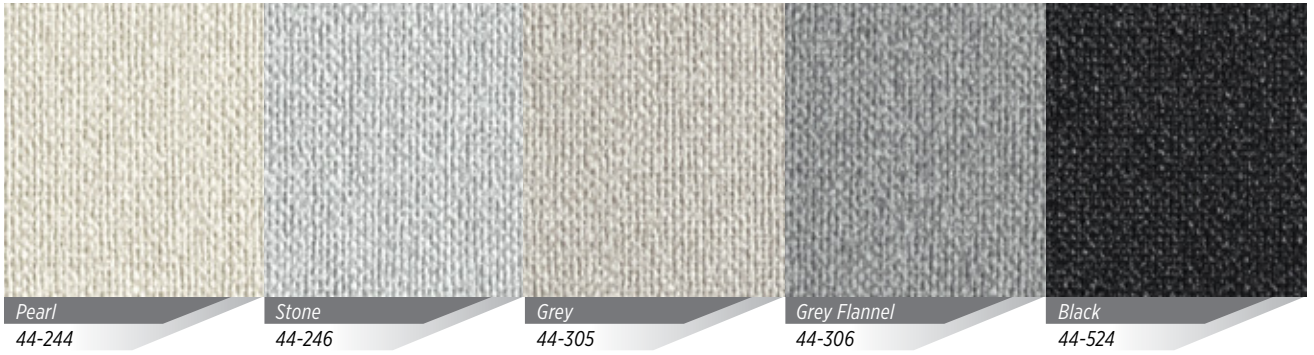

## WOODTONE

NOT recommended for use on a tackable surface.  
Tack holes will become visible over time.

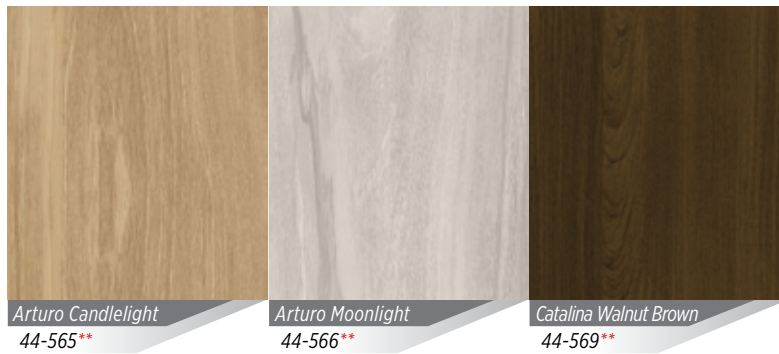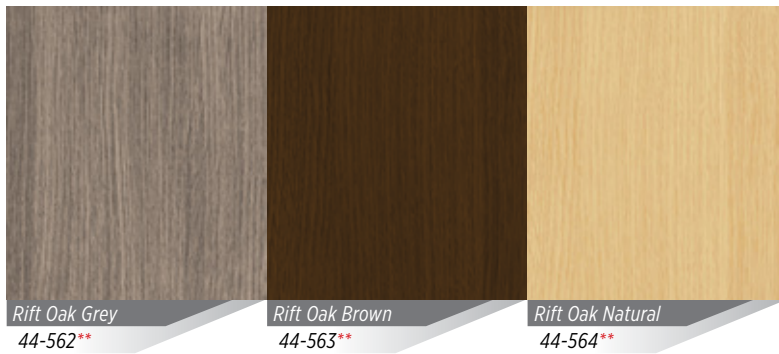

\*\* Additional lead time may apply for this reference, contact Hufcor or your representative for more information.

\* Actual color provided may vary from swatch shown due to dye lot variations.  
Room lighting may also change the color's appearance.



hmarketing@hufcor.com | (800) 542 2371  
2101 Kennedy Rd. Janesville, WI 53545  
**HUF COR.COM**